

GMV

## Vortex Impellered Submersible Sewage Pumps



### FEATURES

- Recessed vortex impeller
- Double mechanical seal (upper: CA/CE, lower: SIC/SIC)
- Auto reset thermal protector (for 1 phase)
- Overheat, overload, phase failure protection (for 3 phase)
- 10 m HO7RN-F cable (1 ph. with plug)
- IP68 Protection, Insulation Class: B
- Maximum liquid temperature: 0-40 °C
- Maximum number of start-ups per hour: 20 ( at regular intervals)
- Maximum immersion depth: 10m
- Equipped with float switch as standard (for 1 ph.)
- Continuous duty (with submerged motor)
- GMV 75-100-150-200 standard version; a vertical, threaded outlet pump body
- GMV 520-530-855-875 models are square flanged with 90° elbow and hose adaptor.

### APPLICATIONS


GMV pump is designed for heavy-duty applications with soiled biological waste waters, sewage, rain waters for liquids which are compatible with the pump materials. They are suitable for both domestic and professional use.

It uses to pump drain water and ground water from installations in or around industrial plants, farms and buildings. They are also suitable for use in applications such as draining flooded areas (garages, cellars, basements, warehouses, parking lots) to transfer water between tanks, emptying ponds, decorative waterfalls, fountains and elevator pits.

# GMV


## Vortex Impellered Submersible Sewage Pumps

### Performance Table and Dimensions

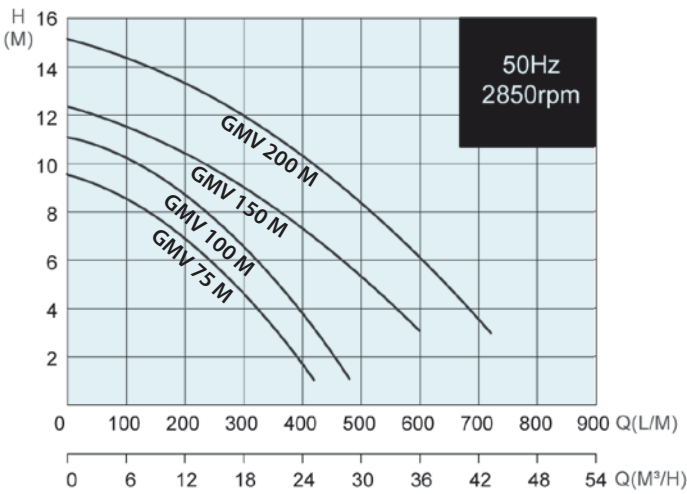

### Mono Phase

Type	P2		1 Ph 230 V		Capacitor		3 Ph 400 V		Discharge	Free Passage mm	l/min Q m³/h	0	100	200	300	400	500	550	666	
	kW	HP	A	μF	V	A	0	6				12	18	24	30	33	40			
GMV 75	0,55	0,75	5,4	20	350	1,7	2"	50	H m	9,7	8,3	6,8	4,5	2	-	-	-	-	-	
GMV 100	0,75	1	6,7	20	400	2,4				11,3	10,2	8,5	6,4	3,8	-	-	-	-	-	-
GMV 150	1,1	1,5	9	30	400	2,8				12,5	11,4	10,3	9	7,1	5,1	4	-	-	-	-
GMV 200	1,5	2	12	40	400	3,9				15,5	14,2	13,3	11,9	10,2	8,1	7	4	-	-	-

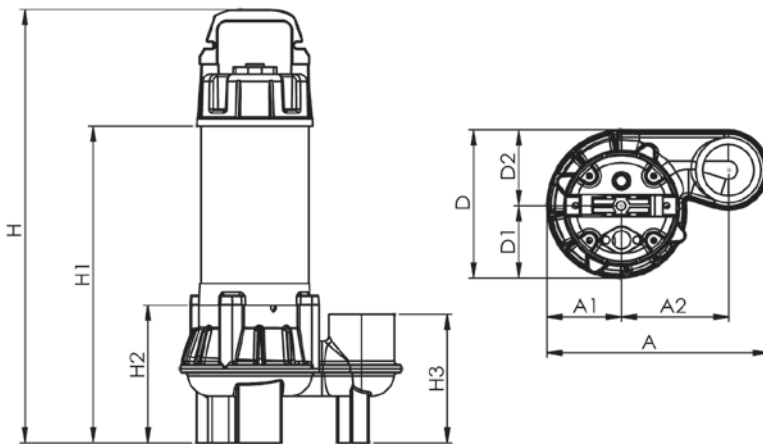

Model	H	H1	H2	H3	D	D1	D2	A	A1	A1	Weight kg
GMV 75	482	352	151	141	164	80	84	244	82	118	15
GMV 100	496	366	151	141	164	80	84	244	82	118	16,5
GMV 150	506	376	151	143	186	88	98	271	93	135	25
GMV 200 (T)	520	396	151	143	186	88	98	271	93	135	26